




**SPECIFICATION**  
 Current Rating:2.5A AC/DC  
 Voltage Rating:250V AC/DC  
 Temperature Range:-25°C~+85°C  
 Insulation Resistance:1000 Megaohms Min.  
 Withstand Voltage:600V AC/Minute  
 Insulator:PBT UL94V-0,Black  
 Contact:Brass,Gold Flash  
 RoHS Compliant






4P~18P




3P



2P

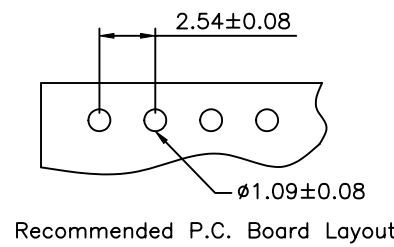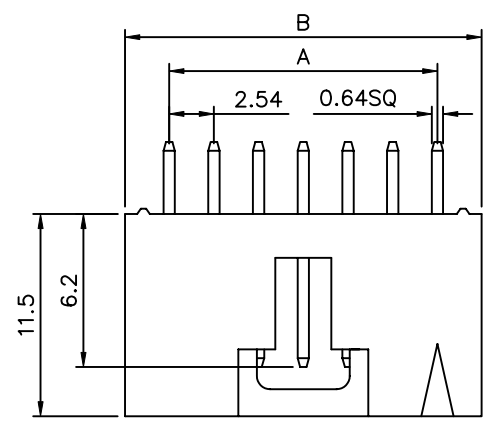

Poles	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
06	12.70	17.78
07	15.24	20.32
08	17.78	22.86
09	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26



**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.	UNIT mm	
02018		MEI				
		BECKY				
		DRAWING BY				
		XYH				
SCALE	NONE	REV.	B2			

NO.	REV.	REVISIONS	CHK	DATE
△B2		Modify 4P → 2P	HZF	03/09/2009
△B1		Modify P/N	INGRID	12/06/2007
△B0		NEW RELEASE	BECKY	06/07/2006