



全部 $\nabla 1.6$

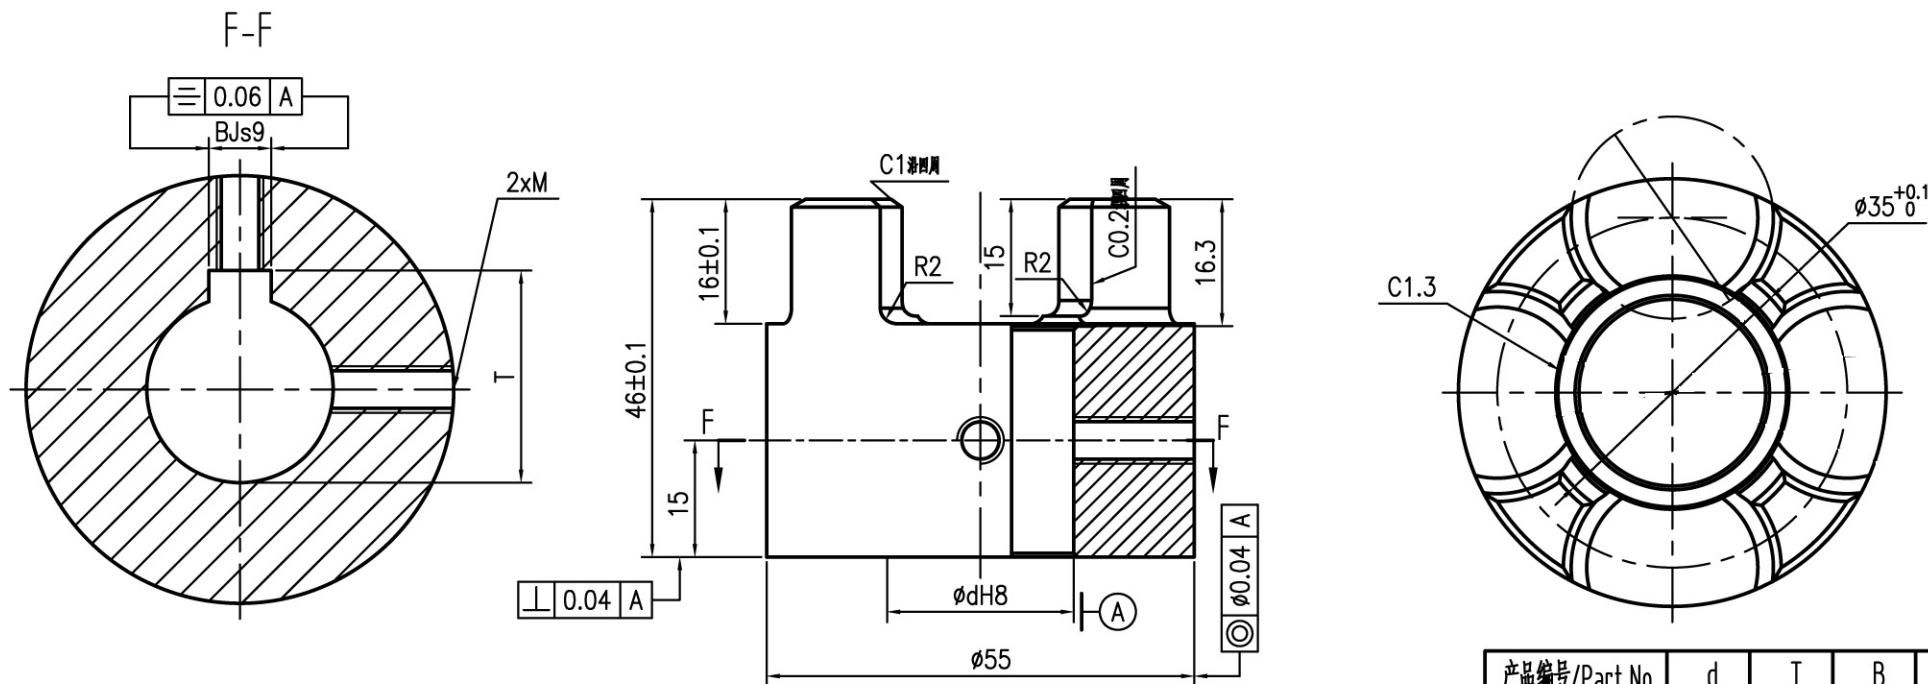

技术要求

1. 未注倒角C0.5, 锐边倒钝去毛刺;
Unquoted chamfer C0.5, break sharp edges
2. 各表面不得有划伤, 锈迹等缺陷;
All surfaces must be rust free and no scratch
3. 未注尺寸公差按ISO 2768-MK标准;
dimensions without tolerance according to 2768-MK
4. 产品打字; Marking part No.

产品编号/Part No.	d	T	B	M
TRM4318_0	12 ^{+0.027} ₀	13.8 ^{+0.1} ₀	4±0.015	M4
TRM4319_0	12.7 ^{+0.027} ₀	14.29 ^{+0.1} ₀	3.18±0.015	8-32UNC
TRM4320_0	14 ^{+0.027} ₀	16.3 ^{+0.1} ₀	5±0.015	M5
TRM4321_0	15.88 ^{+0.027} ₀	18.26 ^{+0.1} ₀	4.76±0.015	10-24UNC
TRM4322_0	17 ^{+0.027} ₀	19.3 ^{+0.1} ₀	5±0.015	M5
TRM4323_0	19 ^{+0.033} ₀	21.8 ^{+0.1} ₀	6±0.015	M6
TRM4324_0	24 ^{+0.033} ₀	27.3 ^{+0.2} ₀	8±0.018	M8
TRM4325_0	25 ^{+0.033} ₀	28.3 ^{+0.2} ₀	8±0.018	M8

				名称/Name: 联轴器爪体		图号/Drawing No: TRM4318_0~4325_0		更新/Rev	
				型号/Code: GS-24		材料/Material: LY12(2024-T6)		重量 比例 1.5:1	
				共 页		第 页		 Chengdu Leno Machinery Co., Ltd Tel: +86-28-65998825; Fax: +86-28-84862968 sales@cdleno.com; www.cdleno.com	
标记/外委	更改文件号	签字	日期						
设计	zhang	标准化							
审核	huang								
工艺			日期						